

## LAVA DSerial-PCI/LP FHB (full height bracket)

PCI Bus Dual 16550 Serial Board with fan-out cable (low profile PCB with full height bracket)

### Features & Benefits

- Adds two 9-pin 16550 UART serial ports to PCI equipped PCs
- Each port is capable of a maximum throughput rate of 115.2 kbps
- Easy Plug and Play installation—automatically selects next available IRQ and I/O addresses
- Includes LAVA Com Port Redirect Utility for renaming Com ports—allows for backward compatibility with software that supports Com 1-4 only
- Compatible with any RS-232 serial peripheral
- Includes fan-out cable
- LAVA Lifetime Warranty


### Connectors

- Two DB-9 male RS-232

### System Requirements

- PCI host slot (5 volt)

Drivers ship with product. For updated software support and current driver information visit [www.lavalink.com](http://www.lavalink.com).

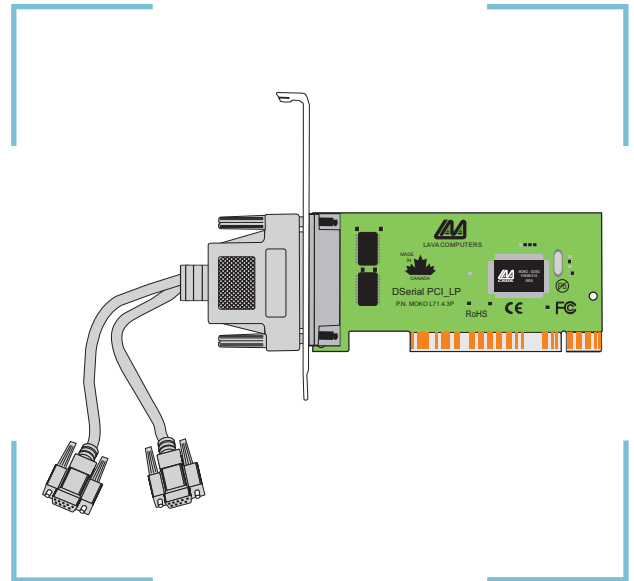

Copyright ©  
LAVA Computer MFG Inc.  
Printed in Canada.  
Specifications subject  
to change without notice.

