




# LAVA D SERIAL-PCI Powered

**PCI Bus  
Dual Serial Board  
with 16550 UARTs  
and powered serial ports**



## Features:

- Dual 9-pin high speed 16550 UART serial ports – adds two COM ports to any PCI-equipped PC. Maximum data throughput rate: 115.2 kbps on each port.
- Power supplied on pins 1 (12 VDC) and pin 9 (5.0 VDC); other lines supplied: RX, TX, GND, CTS, RTS.
- Amperage on powered pins: 1.25 amps per port @ 20 degrees nominal temperature polyfused.
- Requires only one system IRQ – saves valuable resources for other expansion cards.
- Both ports share one PCI bus IRQ – even when accessed simultaneously.
- Automatically selects next available IRQ and COM addresses – just plug it in and go!
- Includes Lava Com Port Redirect Utility for renaming COM Ports – allows for backward compatibility with software that supports COM 1-4 only.
- Compatible with RS-232 serial peripherals – including PDAs, digital cameras, bar-code scanners, and UPSes.
- Compliant with PCI Specification 2.2 5.0 volt PCI; 3.3 volt PCI for PCI-X slots also available.
- Lava Lifetime Warranty

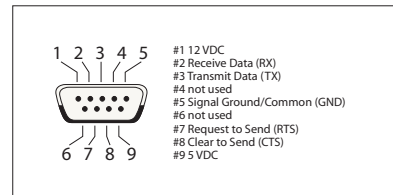

**Lava: "The Source For Ports"**



**LAVA COMPUTER MFG INC.**  
2 VULCAN STREET, TORONTO, ON CANADA M9W 1L2

TEL:(416) 674-5942  
FAX:(416) 674-8262



[www.lavalink.com](http://www.lavalink.com)

Rev. B01