

## LAVA SP-PCle

PCle Bus 16550 Serial Board and EPP Parallel Port Board

### Features & Benefits

- Adds one 9-pin 16550 UART serial port and one EPP parallel port to PCIe equipped PCs
- Serial port is capable of a maximum throughput rate of 115.2 kbps
- One 25-pin EPP parallel port
- Easy Plug and Play installation—automatically selects next available IRQ and I/O addresses
- Includes LAVA Com Port Redirect Utility for renaming Com ports—allows for backward compatibility with software that supports Com 1-4 only
- Compatible with any RS-232 serial or parallel peripheral
- LAVA Lifetime Warranty


### Connectors

- One DB-9 male RS-232
- One DB-25 female EPP

### System Requirements

- PCIe host slot (1x, 2x, 4x, 8x, 16x)
- Windows OS

Drivers ship with product. For updated software support visit [www.lavalink.com](http://www.lavalink.com).

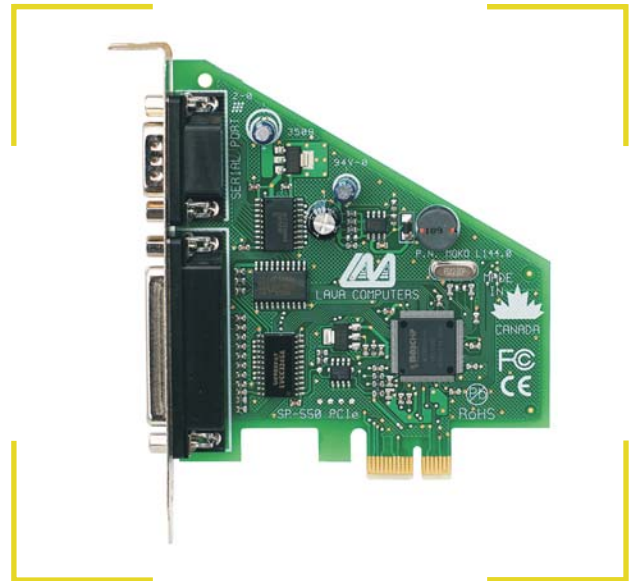

Copyright ©  
LAVA Computer MFG Inc.  
Printed in Canada.  
Specifications subject  
to change without notice.

