

LavaPort-650

PCI Bus Single 16550 Serial Port Board

Features & Benefits

- Adds one 9-pin 16550 UART serial port to PCI-equipped PCs
- Port is capable of a maximum data throughput rate up to 460.8 kbps
- Integrated 32-byte FIFO buffers with software configurable Rx/Tx triggers, 4x clock, and on-board flow control guarantee errorless data transmission even at top speed
- Easy Plug and Play installation — automatically selects next available IRQ and I/O address
- Includes “Lava Com Port Redirect” and “Lava Modem Speed Set” utility software for easy configuration of 230.4 kbps capable external modems
- Compatible with RS-232 serial peripherals including 56K and ISDN modems, PDAs, digital cameras, bar-code scanners, and UPSes
- Compliant with PCI Specification 2.1
- Lava Lifetime Warranty


Connectors

- One DB-9 male RS-232

System Requirements

- PCI host slot

Drivers ship with product. For updated software support visit www.lavalink.com.

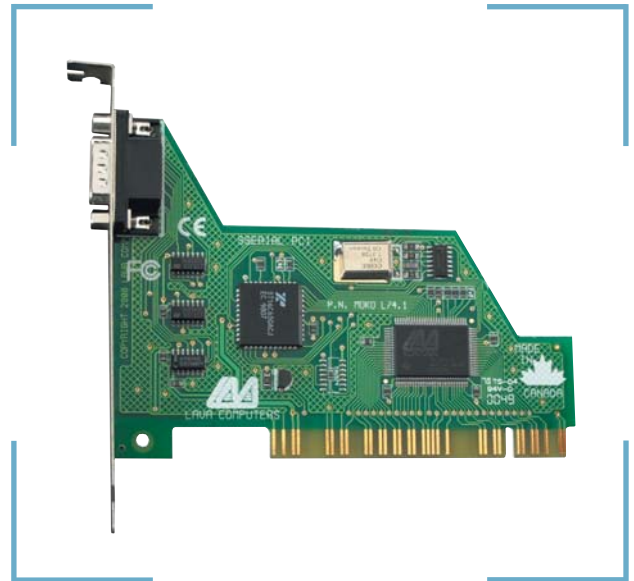

FC CE