

LAVA RS422-550 ISA Bus Dual 16550 Serial Board with RS422 Drivers/Receivers

Features & Benefits

- Adds two 16550 UART serial ports
- (both 9-pin female) to ISA-equipped PCs
- Each serial port independently configurable as Com1 through Com6
- Each serial port selectable for any of IRQ 2/3/4/5/7/10/11/12/15
- Compliant with RS422 specification - balanced pair transmission
- Ideal for use in industrial applications over long distances up to 4000 feet

Lava's RS422 pin-out:

- [also: pin-out diagram]


- Lava Lifetime Warranty

Connectors

- Two DB-9 female RS-422

System Requirements

- ISA host slot

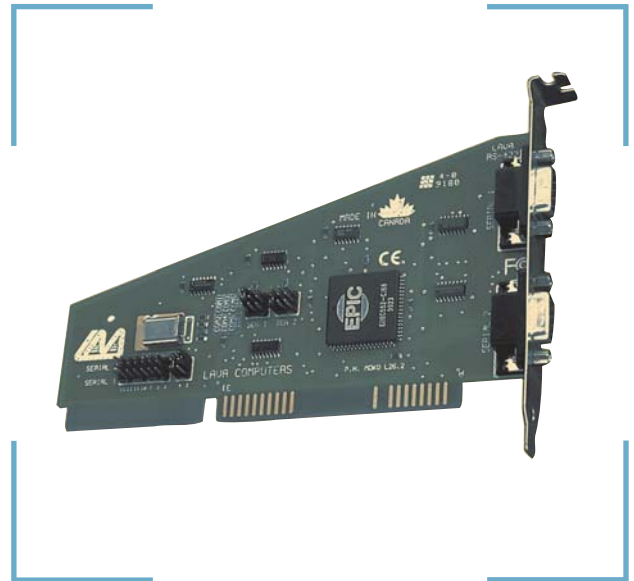

FC CE